


Fils 21

Protech Line

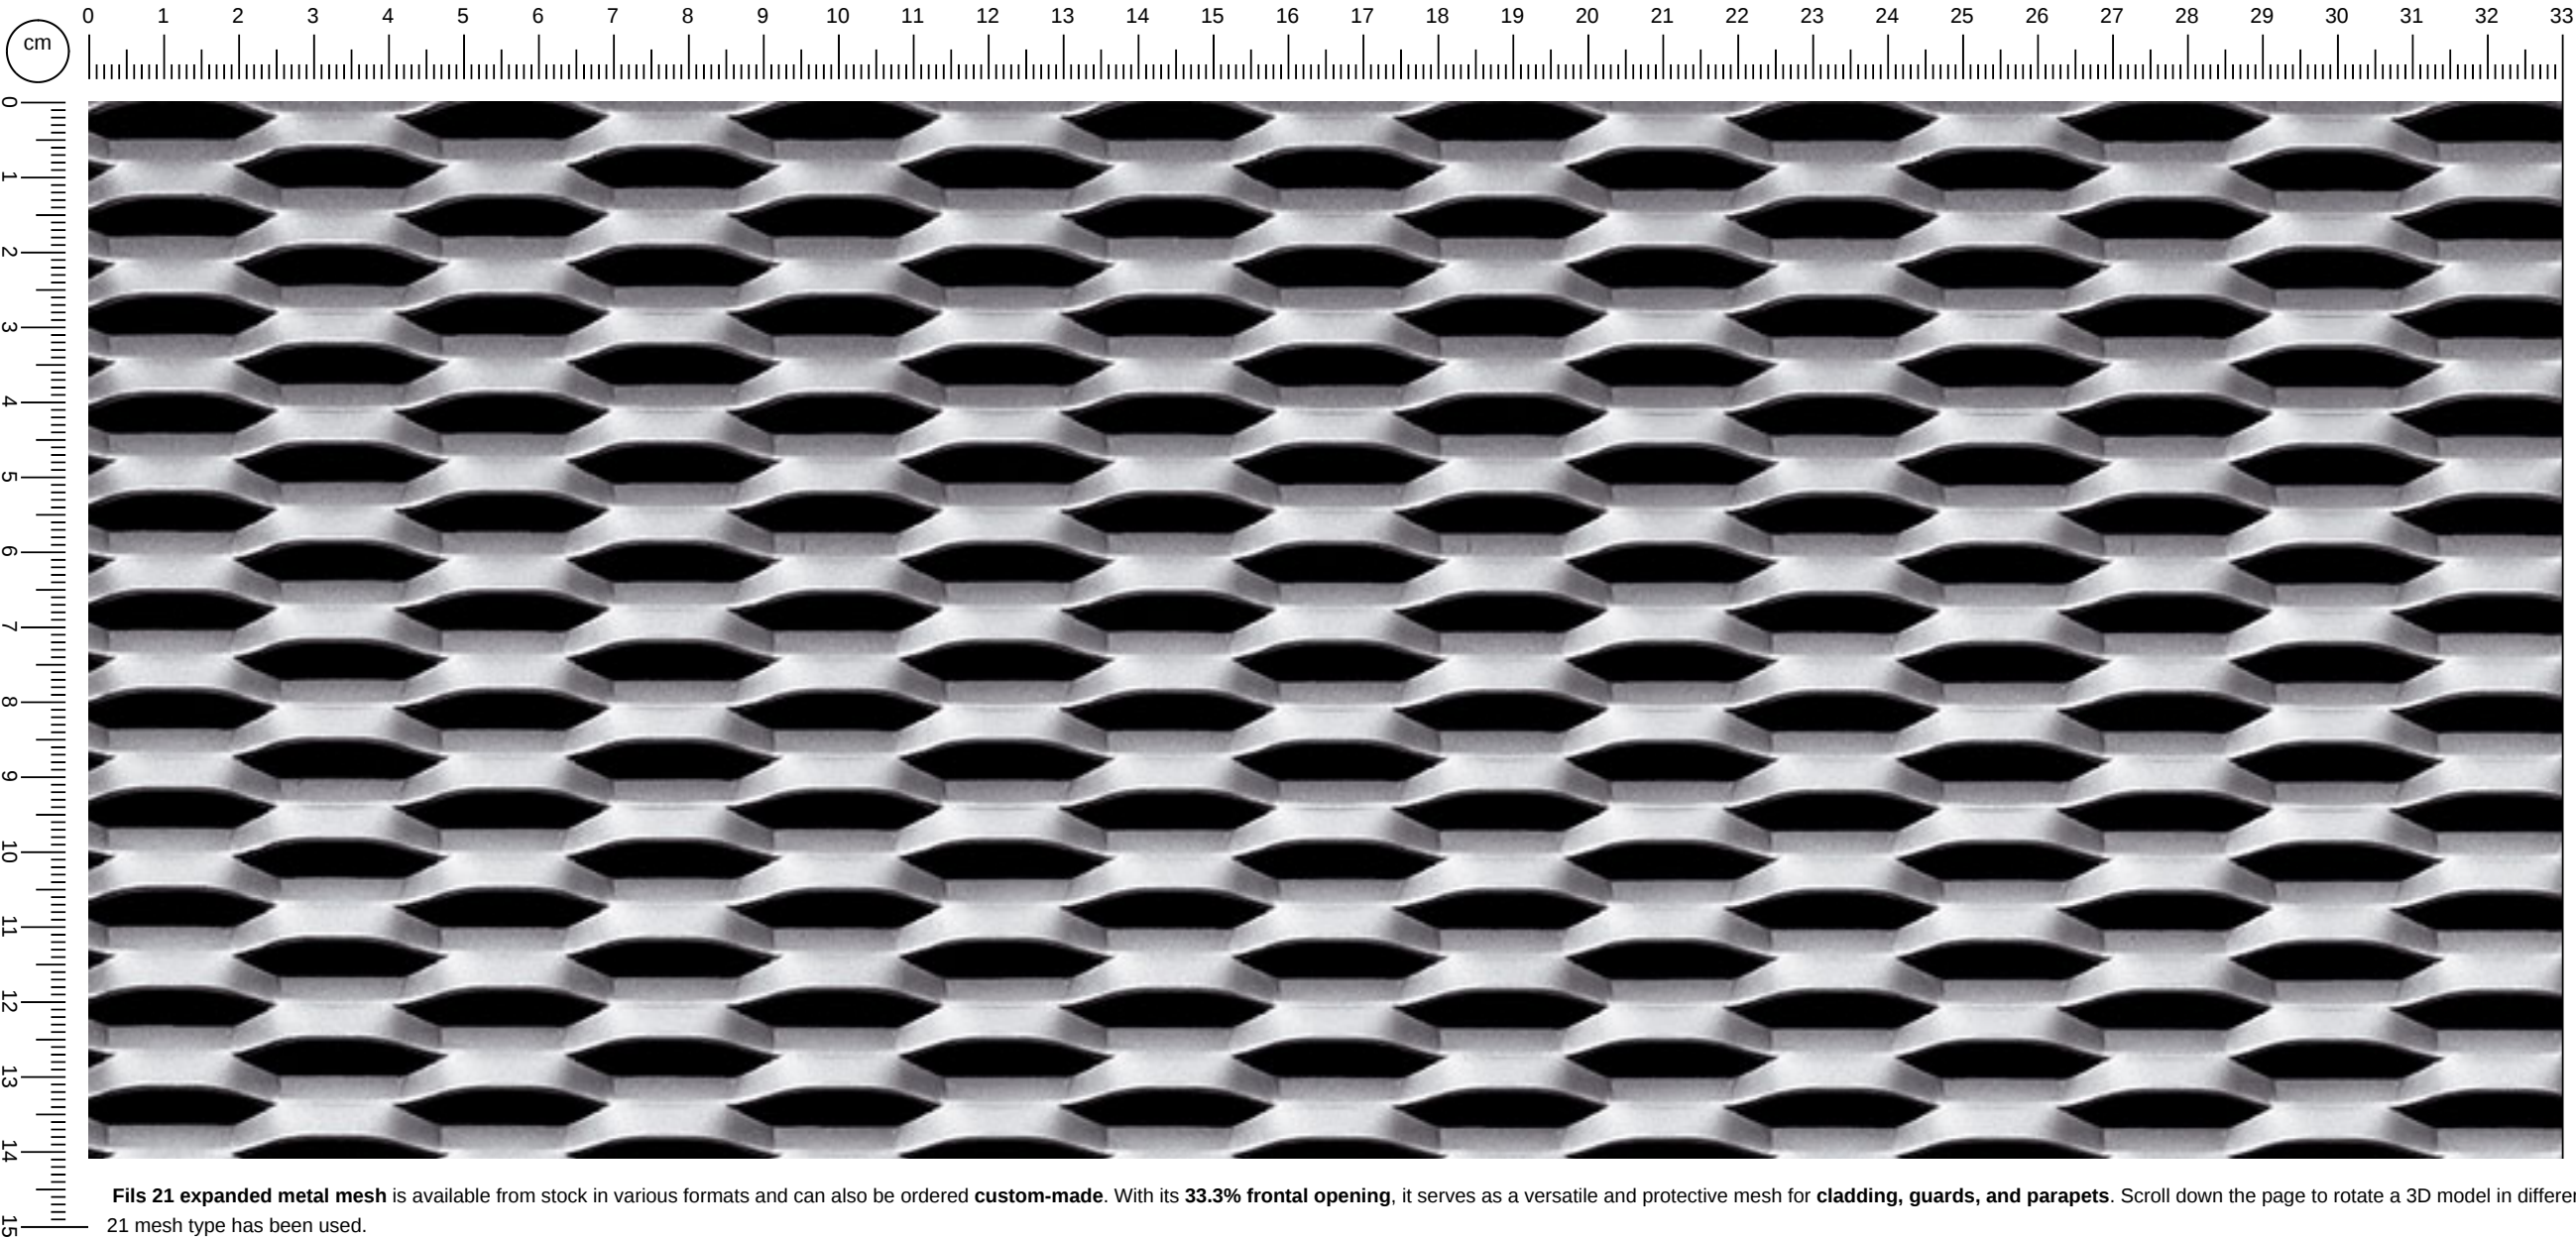

Fils 21 expanded metal mesh is available from stock in various formats and can also be ordered **custom-made**. With its **33.3% frontal opening**, it serves as a versatile and protective mesh for **cladding, guards, and parapets**. Scroll down the page to rotate a 3D model in different positions and explore some of the projects where Fils 21 mesh type has been used.

Product data:
E 45 x 15 (13,4) - 5 x t
Final thickness: 7.00 mm
Open Area: 33.30 %
Open Area MAX: 62 %

Materiale	Nome	mm	Peso kg/m2	Sheet 1000x2000	Sheet 1250x2500	Sheet 1500x3000
Carbon steel	E 45 x 15 (13,4) - 5 x 1,5	1.5	8.8	✔	✔	✔
Carbon steel	E 45 x 15 (13,4) - 5 x 2	2.0	11.6	✔	✔	✔
Sendzimir carbon steel	E 45 x 15 (13,4) - 5 x 1,5	1.5	8.8	✔	✔	✔
Sendzimir carbon steel	E 45 x 15 (13,4) - 5 x 2	2.0	11.6	✔	✔	✔
Aluminium	E 45 x 15 (13,4) - 5 x 1,5	1.5	3.0	✔	✔	✔
Aluminium	E 45 x 15 (13,4) - 5 x 2	2.0	4.0	✔	✔	✔
Aluminium	E 45 x 15 (13,4) - 5 x 3	3.0	6.0	✔	✔	✔

Riferimenti

Nome = Geom DL x DCn (DCr) - av x sp
Geom = Esagonale, Romboidale, Quadra, Tonda, Spianata
DL = Diagonale Lunga
DCn = Diagonale Corta nominale (riferimento interno)
DCr = Diagonale Corta reale
av = Avanzamento
sp = Spessore
spFin = Spessore finale
v/p % = % vuoto su pieno
Larg - DL = Larghezza in direzione DL
Lung - DC = Lunghezza in direzione DC (direzione di stiratura)

Dimensioni

Bobine - Fogli - Rotoli

Dimensione maglia

Facciata a vista