


Academy

Protech Line

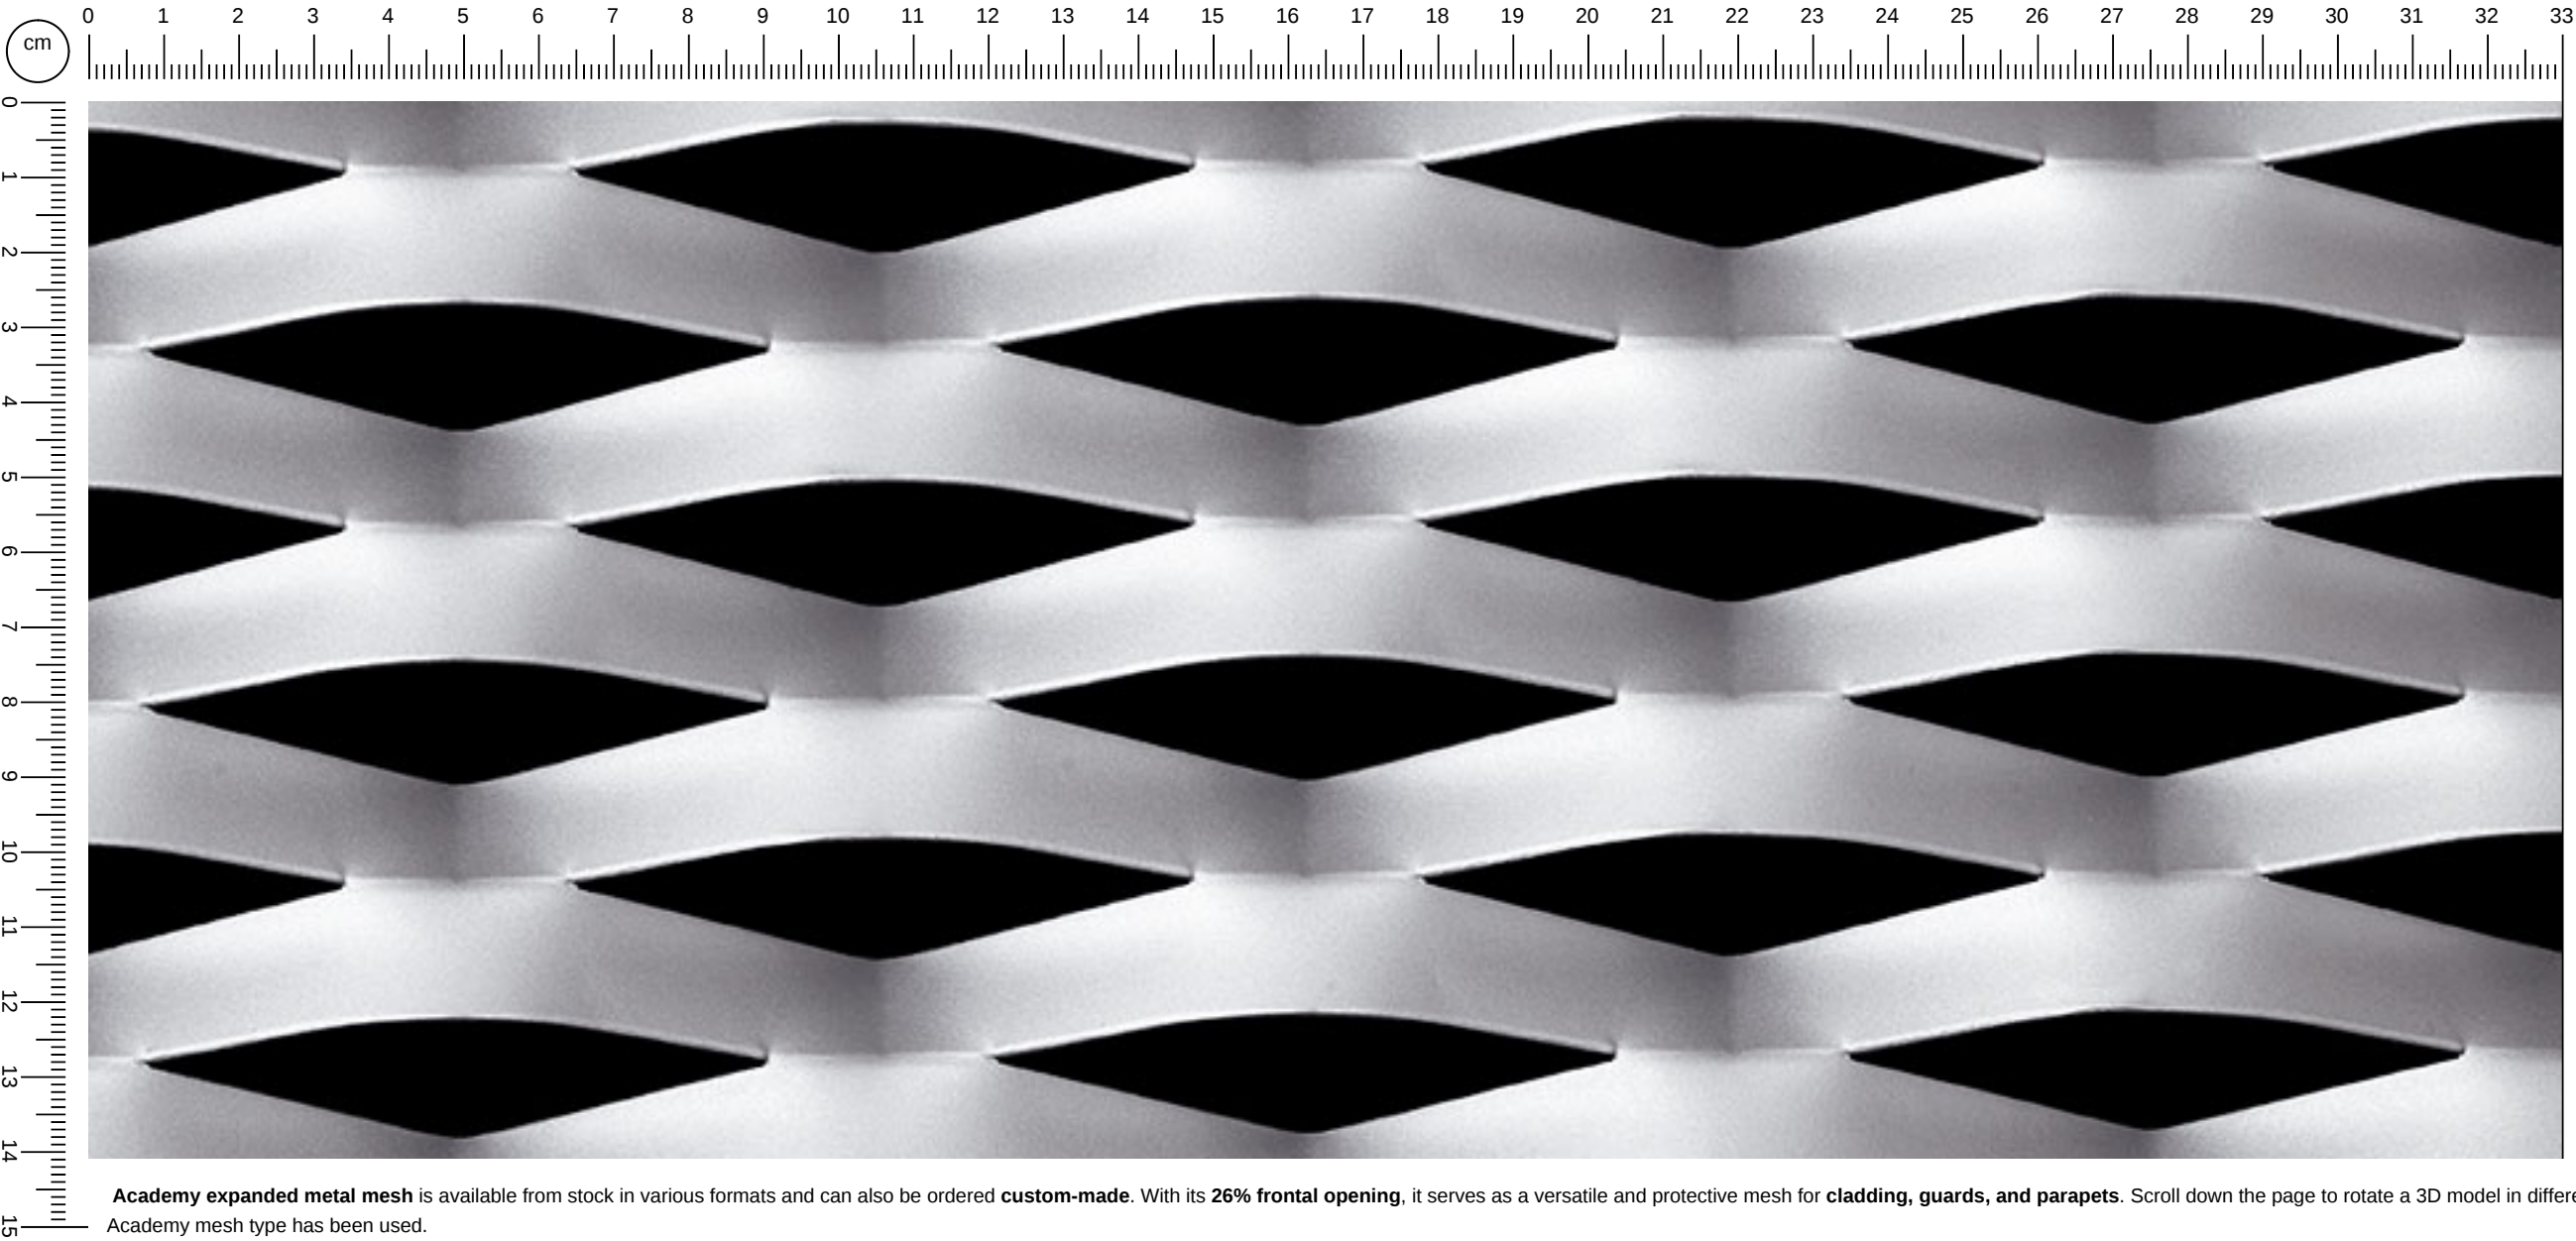

Academy expanded metal mesh is available from stock in various formats and can also be ordered **custom-made**. With its **26% frontal opening**, it serves as a versatile and protective mesh for **cladding, guards, and parapets**. Scroll down the page to rotate a 3D model in different positions and explore some of the projects where Academy mesh type has been used.

Product data:
R 115 x 40 (48) - 20 x t
Final thickness: 21.00 mm
Open Area: 26.00 %
Open Area MAX: 60 %

Materiale	Nome	mm	Peso kg/m2	Sheet 1000x2000	Sheet 1250x2500	Sheet 1500x3000
Carbon steel	R 115 x 40 (48) - 20 x 1,5	1.5	9.7	✔	✔	✔
Carbon steel	R 115 x 40 (48) - 20 x 2	2.0	12.8	✔	✔	✔
Sendzimir carbon steel	R 115 x 40 (48) - 20 x 1,5	1.5	9.7	✔	✔	✔
Sendzimir carbon steel	R 115 x 40 (48) - 20 x 2	2.0	12.8	✔	✔	✔
Aluminium	R 115 x 40 (48) - 20 x 1,5	1.5	3.2	✔	✔	✔
Aluminium	R 115 x 40 (48) - 20 x 2	2.0	4.2	✔	✔	✔
Aluminium	R 115 x 40 (48) - 20 x 3	3.0	6.4	✔	✔	✔

Riferimenti

Nome	=	Geom DL x DCn (DCr) - av x sp
Geom	=	Esagonale, Romboidale, Quadra, Tonda, Spianata
DL	=	Diagonale Lunga
DCn	=	Diagonale Corta nominale (riferimento interno)
DCr	=	Diagonale Corta reale
av	=	Avanzamento
sp	=	Spessore
spFin	=	Spessore finale
v/p %	=	% vuoto su pieno
Larg - DL	=	Larghezza in direzione DL
Lung - DC	=	Lunghezza in direzione DC (direzione di stiratura)

Dimensioni

Bobine - Fogli - Rotoli

Dimensione maglia

Facciata a vista